Remarks

This Preliminary Amendment cancels without prejudice original claims 1-14 in the underlying PCT Application No. PCT/DE03/00986 and adds new claims 15-27. The new claims conform to U.S. Patent and Trademark Office rules and do not add new matter to the application.

In accordance with 37 C.F.R. § 1.125(b), the Substitute Specification (including the Abstract, but without the claims) contains no new matter. The amendments reflected in the Substitute Specification (including Abstract) are to conform the Specification and Abstract to U.S. Patent and Trademark Office rules or to correct informalities. As required by 37 C.F.R. § 1.121(b)(3)(ii) and § 1.125(c), a Marked Up Version Of The Substitute Specification comparing the Specification of record and the Substitute Specification also accompanies this Preliminary Amendment. Approval and entry of the Substitute Specification (including Abstract) are respectfully requested.

The underlying PCT Application No. PCT/DE03/00986 includes an International Search Report, dated August 4, 2003. The Search Report includes a list of documents that were uncovered in the underlying PCT Application.

Applicants assert that the subject matter of the present application is new, non-obvious, and useful. Prompt consideration and allowance of the application are respectfully requested.

Respectfully Submitted,

KENYON & KENYON

Dated: 10/6/04
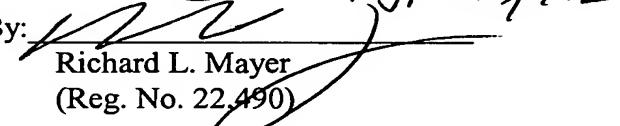
By: Richard L. Mayer
(Reg. No. 22,490)

One Broadway
New York, NY 10004
(212) 425-7200

CUSTOMER NO. 26646

5

METHOD FOR MONITORING AN INTERNAL COMBUSTION ENGINE

Field of the Invention

The invention relates to a method for monitoring an internal
combustion engine in which fuel is injected directly into at
least one combustion chamber in at least two partial amounts
5   via at least one final controlling element, in which, at least
on the basis of a fuel mass injected and/or to be injected, an
actual torque of the internal combustion engine is determined,
such actual torque then being compared with a permissible
torque of the internal combustion engine, and an error
10   response being initiated when the actual torque is in a
predefined ratio to the permissible torque.

The invention further relates to a corresponding application
of the method for monitoring an internal combustion engine as
15   well as a corresponding device.

Description of Related Art

Modern internal combustion engines are equipped with engine
20   controllers which control the power output and torque of the
internal combustion engine by regulating particular parameters
as a function of input variables. Multiple monitoring measures
to ensure the safe operation and the availability of the
internal combustion engine must be provided to prevent
25   malfunctions, in particular malfunctions of the electronic
control unit for the engine controller.

~~Background Information~~

30   DE 199 00 740 [[A1]] introduces a method and a device for
operating an internal combustion engine which is operated

MARKED-UP VERSION OF
SUBSTITUTE SPECIFICATION

using a lean air/fuel blend under certain operating conditions. The fuel mass to be injected, and/or the injection time to be used is determined on the basis of a setpoint value. In order to monitor operability, the actual torque of the internal combustion engine is determined on the basis of the fuel mass to be injected and/or the injection time which has been or is to be determined, compared with a maximum permissible torque, and an error response is initiated if the actual torque exceeds the maximum permissible torque.

According to DE 199 00 740 A1, the fuel mass to be injected is determined on the basis of the injection time, which is transmitted from the controller, and possibly additional variables such as the fuel pressure. The fuel mass thus determined is converted to a transmitted engine torque which is corrected taking into account efficiencies such as, for example, the injection time efficiency. At the same time, a variable representing the oxygen concentration in the exhaust gas is compared with at least one predefined threshold value and an error response is initiated if it exceeds the threshold value.

DE 101 23 035.4 (not a prior publication) discloses an internal combustion engine in which fuel metering may be divided into at least one first partial injection and a second partial injection. During the second partial injection, a fuel quantity variable, which characterizes the fuel quantity that is injected during the second partial injection, is corrected on the basis of at least one pressure variable, which characterizes the fuel pressure, the fuel quantity variable, and at least one additional variable.

~~Object~~ <u>Summary Of The Invention</u>

The object of the present invention is to provide a method for monitoring the torque of an internal combustion engine

according to which fuel metering is divided into at least one
first partial injection and a second partial injection.

~~Achievement of the Object and Advantages of the Invention~~

5   The object is achieved by a method for monitoring an internal
combustion engine in which fuel is injected directly into at
least one combustion chamber in at least two partial
injections via at least one final controlling element, in
10   which an actual torque of the internal combustion engine is
determined at least on the basis of a fuel mass injected
and/or to be injected, such actual torque is then compared
with a permissible torque of the internal combustion engine,
and an error response is initiated if the actual torque is in
15   a predefined ratio to the permissible torque, and in which a
total fuel volume of all partial injections is taken into
account for the determination of the fuel mass that has been
and/or is to be injected.

20   This measure according to the present invention provides a
highly advantageous method for torque monitoring which takes
into account multiple partial injections and may be applied in
any operating situation.

25   A fuel volume of a partial injection is advantageously
determined at least on the basis of an actuation period of the
final controlling element in question and a pressure acting on
the fuel. A variable defining the actuation start may be
considered instead of or in addition to such pressure. This
30   may be performed, for example, via a characteristic map that
is stored in the control device of the internal combustion
engine and applied specifically to the partial injection to
which it relates. If the final controlling element is designed
as an injector, the corresponding fuel volume value is derived
35   from the characteristic map on the basis of input variables
including the actuation time of the injector in question and

the pressure acting on the fuel (in common rail internal combustion engines, this is the rail pressure in the common rail). If the final controlling element configured as a unit injector system or a unit pump system, the actuation start is used instead of the pressure.

The total fuel volume of a combustion cycle may then be determined from the sum total of the fuel volume of all partial injections. Based on this total fuel volume, a fuel mass may be determined via a known fuel density.

An advantageous refinement of the present invention provides that the determined fuel volume of a partial injection is corrected depending on an actuation start of the injector in question. Such correction is advantageously done using a correction factor that is derived from an injection efficiency characteristic map which is a function of the actuation start. This refinement offers the great advantage of considering the possibly non-linear correlation between the actuation start of the injector and the attained torque effect achieved. In view of the current state of development of modern internal combustion engines having exhaust aftertreatment systems this is a beneficial approach, for in such engines a modified actuation start does not necessarily influence the torque generated by the internal combustion engine but may merely cause a rise in the temperature of the exhaust gas.

According to a particularly advantageous refinement of the present invention, the previously determined fuel mass is linked to a wave correction mass to yield a corrected fuel mass. This may be achieved, for example, by subtracting the wave correction mass from the previously measured fuel mass. This correction provides a highly advantageous method for taking into account wave phenomena that might occur in a high pressure injection system such as a common rail system, in the feed line from the fuel reservoir to the injector, and

influence the fuel mass injected during the injector actuation time. The wave correction mass is advantageously determined on the basis of at least the fuel volume of the partial injections and the pressure acting on the fuel.

A torque of the internal combustion engine is determined from the fuel mass that has been corrected in the manner described above together with a rotational speed of the internal combustion engine. This is advantageously performed via a characteristic map that is stored in the engine controller. It is also possible to include other influencing parameters besides the rotational speed of the internal combustion engine. According to the present invention, the determined torque of the internal combustion engine is linked to an efficiency correction factor to produce a corrected torque of the internal combustion engine. This efficiency correction factor particularly advantageously considers influencing parameters such as the temperature of the internal combustion engine, engine friction, oil temperature and oil quality.

The error response is then advantageously initiated if the actual torque is greater than the permissible torque.

A further advantage is provided by the use of the monitoring method according to the present invention for monitoring a direct injection diesel engine, in particular one having a common-rail system and/or a unit injector system or a unit pump system.

Further advantageous embodiments arise from the following description of exemplary embodiments.

Detailed Descriptions of Exemplary Embodiments <u>Brief Description of the Drawings</u>

MARKED-UP VERSION OF
SUBSTITUTE SPECIFICATION

Figure 1 shows a first exemplary embodiment of the method according to the present invention[[;]].

Figure 2 shows a detail of the first exemplary
5   embodiment[[;]].

Figure 3 shows a possible extension of the first exemplary embodiment, and.

10   Figure 4 shows a second exemplary embodiment of the method according to the present invention.

Detailed Description of the Invention

15   Figure 1 shows a first exemplary embodiment of the method according to the present invention for monitoring an internal combustion engine. The object of the method described in Figure 1 is to determine an actual torque, which is compared with a permissible torque. The method described in Figure 1,
20   which normally runs in the engine controller of an internal combustion engine, assumes that certain input variables have been previously stored in the engine controller. These input variables are identified in Figure 1 by reference numbers 1 through 7, 17, 22 and 24.
25
The exemplary embodiment represented in Figure 1 is described on the basis of various injection modes, such as are normally used in direct injection diesel engines. However, the method according to the present invention is not limited to diesel
30   engines; it can be applied in principle to any direct injection internal combustion engine having multiple injection modes.

The direct injection diesel engine that is monitored by the
35   method according to Figure 1 is a common rail diesel engine in which the fuel for injections is available in a shared fuel

distributor, the common rail. From the common rail, where the fuel is under high pressure, the fuel travels through normally short, high-pressure feed lines to the injectors, which inject the fuel directly into the combustion chambers of the engine.

5   The pressurized fuel available in the common rail allows various fuel injection modes to be used for injecting fuel into the same combustion chamber. These various injection modes may be pilot injection, main injection, or post-injection.

10

Reference number 1 in the method described in Figure 1 refers to instantaneous rail pressure p. Reference number 2 refers to the actuation period of an injector for a main injection ti_Main. This main injection generates most of the torque of

15   the internal combustion engine. Reference number 3 refers to the actuation period of the injector for a first pilot injection ti_Pilot1. This first pilot injection may be initiated, for example, when the crankshaft is at an angle 10 to 20 degrees prior to the main injection and its main effect

20   besides generating torque is to reduce the running noise of the engine. Reference number 4 refers to the actuation period of a second pilot injection ti_Pilot2. This second pilot injection may help reduce the running noise of the internal combustion engine but in conjunction with the first pilot

25   injection, for example may also improve exhaust gas values. Reference number 5 refers to a third pilot injection ti_Pilot3, for example, which may be injected into the combustion chamber well before any of the other injections, thereby significantly increasing torque. Reference number 6

30   refers to the actuation time of the injector for a first post-injection ti_Post1, and reference number 7 refers to the injector actuation time of a second post-injection ti_Post2. Both post-injections are primarily used to lower exhaust emissions and possibly to clean an N_{ox} accumulator-type

35   catalytic converter or particle filter.

Rail pressure p according to reference number 1 and the injector actuation time for main injection ti_Main, referred to by reference number 2, are supplied to a characteristic map Main (reference number 8). Depending on the actuation time supplied and the rail pressure p, the output from characteristic map Main (reference number 8) is a fuel volume of the main injection, which is supplied to a summer 14. The instantaneous rail pressure p, referred to by reference number 1, and the corresponding injector actuation times expressed as reference numbers 3 (ti_Pilot1), 4 (ti_Pilot2), 5 (ti_Pilot3), 6 (ti_Post1) and 7 (ti_Post2) are supplied to the characteristic maps Pilot1 (reference number 9), Pilot2 (reference number 10), Pilot3 (reference number 11), Post1 (reference number 12), and Post2 (reference number 13). The result is a fuel volume in each case, similar to the characteristic map 8, which is also supplied to summer 14. At point 15, summer 14 provides, as a result, the total fuel volume introduced into a combustion chamber throughout a combustion cycle via the injector using various injection modes.

This fuel volume is then supplied to a node 16, which also receives the signal regarding fuel density rho from signal block 17. The linkage, i.e., multiplication of the fuel volume by fuel density rho 17 yields fuel mass 18.

Fuel mass 18 is supplied to a subtractor 19, which has the output signal from a signal block 20 as a further input signal. A wave correction fuel mass is determined in signal block 20 and is used to compensate for waves arising in the high pressure line between the common rail and the associated injector, which occur when multiple injection modes are executed in rapid succession. When several injections are executed in rapid succession, the fuel in the high pressure line may not have fully settled by the time the next injection occurs. This condition causes the physical phenomenon of a

standing wave in the high-pressure line. The input variables applied to wave correction according to block 20 are instantaneous rail pressure p from block 1, fuel density rho from block 17, and the output signals from characteristic maps

5   8, 9 and 10, on the basis of which the fuel volumes for the main injection as well as the first and second post-injections are supplied to wave correction block 20. The way in which the wave correction fuel mass is determined in block 20 will be described in the explanation of Figure 2 below.

10

As indicated previously, the output signal from wave correction block 20 is supplied to subtractor 19. The subtractor subtracts the wave correction fuel mass from the previously determined fuel mass 18. The resulting corrected

15   fuel mass is supplied to a torque characteristic map 21. Torque characteristic map 21 also receives rotational speed n of the internal combustion engine from block 22. The output variable from the supplied corrected fuel mass and rotational speed n is the torque of the internal combustion engine.

20

This determined torque of the internal combustion engine is supplied to node 23. Node 23 also receives the signal from block 24. The signal from block 24 is an efficiency factor that is present in the engine controller. This efficiency

25   factor takes into account certain variables including the temperature of the engine, the engine friction, the oil temperature, the oil quality and, where applicable, other influencing parameters. Efficiency factor 24 is multiplied by the previously determined torque of the internal combustion

30   engine in node 23. The output from node 23 is the calculated actual internal torque of the internal combustion engine.

This actual torque 25 is supplied to a comparison routine 26, in which the previously determined actual internal torque is

35   compared with a maximum permitted internal torque of the internal combustion engine. If it is determined that the

actual internal torque is greater than the permitted torque of the internal combustion engine, an error response is initiated. Such an error response might be, for example, a safety cut-off of the fuel supply or limiting the rotational

5   speed of the internal combustion engine. Limiting the rotational speed is preferred to possibly limiting the torque because the rotational speed is easier to monitor. Other error responses might include making an entry in an error log, displaying an error message to the operator of the vehicle or

10   re-starting the engine controller.

Determining permitted torque is known to those skilled in the art and may be calculated, for example, according to the monitor concept via a redundant torque path in the engine

15   controller. One of the variables influencing the permitted torque is, for example, the operation of the gas pedal.

Figure 2 shows in detail wave correction block 20, as was shown previously in the description of Figure 1. As was

20   indicated in the description of Figure 1, the fuel volume of first pilot injection Pilot1 (reference number 30), the fuel volume of second pilot injection Pilot2 (reference number 31), instantaneous rail pressure p (reference number 32), the fuel volume of main injection Main (reference number 33) and

25   density rho of the fuel used (reference number 17) are supplied to the wave correction block as inputs. From the supplied fuel volumes (30, 31 and 33) and supplied fuel density rho (17), the wave correction block first determines the pertinent fuel mass in signal blocks 30, 31 and 33, that

30   fuel mass then being available as an output signal from each of blocks 30, 31 and 33. Figure 2 does not show the associated linkages with fuel density rho since there is an option to supply the determined fuel masses directly to the wave correction block. With reference to the drawing in Figure 1,

35   this procedure would require that after each individual fuel volume has been determined, it be converted to individual fuel

masses before the individual fuel masses are combined in a summer (corresponds to block 14 in Figure 1) to yield a total fuel mass. In this case, each individual fuel mass would immediately be available as a signal. The final decision on

5   which method to use will depend on the selection of those skilled in the art based on various influencing parameters, such as the runtime values of the controller.

Instantaneous rail pressure 32 and the fuel mass of main

10   injection 33 are supplied to a first quantity correction characteristic map 34 as input variables. The result from quantity correction characteristic map 34 is a first corrected quantity 35. The same input variables as were supplied to quantity correction characteristic map 34 are also supplied as

15   inputs to a quantity correction characteristic map 36. The result from second quantity correction characteristic map 36 is a second corrected quantity 37. The fuel mass of main injection 33 and the fuel mass of first pilot injection 30 are supplied as input variables to a third quantity correction

20   characteristic map 38. The result from this third quantity correction characteristic map is a third corrected quantity 39. First corrected quantity 35 and second corrected quantity 37 are supplied to a first selector block 40. Third corrected quantity 39 is supplied to a second selector block 41. Second

25   selector block 41 also receives a preset factor 42 as an input variable, which in this embodiment is set to zero. In other words, the output variable from first selector block 1 is either first corrected quantity 35 or second corrected quantity 37, and the output value from second selector block

30   41 is either third corrected quantity 39 or preset value 42 (=0).

The fuel mass of second pilot injection 31 is supplied to a first input of a first query logic circuit 43, which then

35   returns a "High Level" as the output value when the first input value received by query logic circuit 43 is greater than

the second input value. A second preset value 44, zero in this exemplary embodiment, is supplied to first query logic circuit 43 as a second input value. First query logic circuit 43 functions in such a way that the result of query logic circuit

5   43 indicates "High Level" if fuel mass variable 31 is present. If the value for fuel mass 31 is absent, the output value from query logic circuit 43 is "Low Level".

The fuel mass of first pilot injection 30 is supplied to a
10   first input of a second query logic circuit 49, which then returns a "High Level" as the output value when the first input value received by query logic circuit 49 is greater than the second input value. A fourth preset value 50, which is set to zero in this embodiment, is supplied to second query logic
15   circuit 49 as a second input value. Second query logic circuit 49 functions in such a way that the result of query logic circuit 49 indicates a "High Level" if fuel mass value 30 is present. If the value for fuel mass 30 is absent, the output value from query logic circuit 49 is "Low Level."
20

The output signal from first query logic circuit 43 is supplied to a NOT gate 45. The output value from NOT gate 45 is supplied to a gate input of first selector gate 40. When first selector gate 40 is in a neutral position (for a "Low
25   Level" signal at the gate input), it sends a signal of first correction quantity to block 35 as the output value from first selector gate 40. On the other hand, if a "High Level" is at the gate input, second corrected quantity 37 is output as the output variable from first selector gate 40. The output value
30   from first selector gate 40 is supplied to a summer 46.

The output signal from second query logic circuit 49 is supplied to an input gate of second selector gate 41. When second selector gate 41 is in a neutral position (for a "Low
35   Level" signal at the gate input), it sends a signal of first preset value (in this case zero) to block 42 as the output

value from second selector gate 41. On the other hand, if a
"High Level" is at the gate input, third corrected quantity 39
is output as the output variable from second selector block
41. The output value from second selector gate 41 is also
5   supplied to summer 46.

The output signals from query logic circuits 43 and 49 are
also supplied to an OR gate 51, which has "High Level" as the
output signal if an output signal from query logic circuits 43
10   and 49 also indicate "High Signal". If only "Low Signals" are
present at the input of OR gate 51, the output of OR gate 51
will also return only a "Low Signal."

The output signal from summer 46 is supplied to a third
15   selector block 47, which also receives a third preset value 48
as an additional input value, set to zero in this embodiment.
The output signal from OR gate 51 is supplied to the input of
third selector block 47. When third selector gate 47 is in a
neutral position (for a "Low Level" signal at the gate input),
20   it returns the signal of the third preset value (i.e. zero) to
block 48 as the output value from third selector gate 47. On
the other hand, if a "High Level" is at the gate input, the
output value from summer 46 is output as the output variable
from third selector block 47.
25

The output signal from third selector block 47 is supplied to
an output signal block 52 and represents the desired wave
correction quantity that is used in the configuration
according to Figure 1.
30

Figure 3 shows a possible extension of the first embodiment in
Figure 1. In modern diesel engines equipped with exhaust
aftertreatment systems, it may happen that the injector
actuation period and in particular the actuation start may be
35   modified so that they do not affect the torque. Theoretically,
this condition may occur during all injection modes described

earlier. In such cases, the start and duration of fuel injection actuation do not return an unequivocal analysis of the generated torques. For example, it is possible to retard the actuation start of the main injection from a few degrees before top dead center to a few degrees after top dead center to regenerate an exhaust aftertreatment system. This delay of the injection start does not affect the torque and results merely in an elevated combustion temperature which assists in the regeneration of the exhaust aftertreatment system. In these instances it is thus necessary to consider the effectiveness of the actuation start and duration. This is accomplished by the method described in the embodiment in Figure 3. Actuation start 60 is supplied to an effectiveness characteristic map 61. This effectiveness characteristic map 61 must be stored individually for each injection mode in the engine controller. The output value from the effectiveness characteristic map is a correction factor 62 which enables the determined fuel volumes as output variables of blocks 8, 9, 10, 12 and 13 according to Figure 1 to be corrected. For example, it might be possible to extend the main injection by factor 2 while retarding the actuation start, as described earlier, from a few degrees before TDC to a few degrees after TDC. This modification to the main injection would have no impact on the torques which would necessitate the use of the correction factor 0.5, since the doubled fuel volume only results in the same torque. Also, an additional effectiveness characteristic map may be used for the injection duration, or a combined effectiveness characteristic map for the injection start and duration might be used.

A further refinement of the method according to the present invention provides for a plausibility check of the fuel mass determined as shown in the exemplary embodiment of Figure 1. This may be assured, for example, by combining a lambda sensor value with the signal from a hot film air mass flow meter and the rotational speed while measuring the exhaust feedback

rate. In this way, a second, independent fuel mass variable
can be determined. This in turn enables the mass of fuel
actually injected to be calculated precisely within reasonable
tolerances, thereby providing an average injected fuel mass
5   derived from independent variables which may be used in a
plausibility check of the fuel mass derived from the actuation
data.

In summary, the monitoring method according to the present
10   invention provides a capability for continuous monitoring of
torques throughout the entire speed range of the internal
combustion engine. This increases the safety of the overall
system and assures improved error response.

15   In the context of this application, the comparison of torques
was described on the basis of internal torques of the internal
combustion engine. Nevertheless, the invention may be used for
any given torque provided the torques are comparable.

20   The input data according to Figure 1 is advantageously
determined synchronously with the rotational speed. This
measurement is carried out by the controller (not shown in the
figures) of the internal combustion engine which is not
included in the scope of this application.
25
The device according to the present invention is an internal
combustion engine having a controller capable of performing
the method according to the present invention.

30   Besides the common rail systems, in which pressure buildup is
initiated by the controller and, at the end of fuel metering,
separated therefrom other systems are also known in which
pressure buildup and the control of fuel metering are closely
linked. These systems also require monitoring of the control
35   unit such as is provided by the present invention. This
applies in particular to the unit injector systems and/or unit

pump systems. In general, the method described herein may be used for all fuel metering systems in which the start and end of fuel metering are modified via a final controlling element. The actuation start of this final controlling element
5   generally determines the start of fuel metering, and the actuation end is defined by the end of fuel metering. The period between the actuation start and finish is again defined by the quantity of fuel to be injected.

10   Normally, the unit injector systems carry out only one main injection, one pilot injection and one post-injection. In theory, additional injections are also possible. In the following, this method will be described with reference to the example of the first pilot injection and the second post-
15   injection. According to the present invention, this procedure may be applied to the other injection modes and/or to more or fewer partial injections.

     In the method described in the foregoing, with a common rail
20   system, the essential influencing parameters are the fuel amount to be injected, the actuation time and the rail pressure. These variables are considered via the corresponding characteristic maps. Additional variables may also be taken into account, such as for example, rotational speed, fuel
25   density, and/or temperature variations. In contrast to the foregoing, the present invention recognized that in a unit injector system, or a unit pump system, or generally in a system in which the pressure buildup is not decoupled from the fuel metering, the essential influencing variables on the fuel
30   quantity are the actuation start and duration. The rotational speed, temperature, and/or the fuel density may also be taken into account in addition to these variables. Other variables that characterize the actuation start may also be used instead of the actuation start. In particular, a feed start signal may
35   be used.

Using these variables, a default fuel mass QKV, also known as the virtual fuel mass, is set. Using this virtual fuel mass QKV as a reference, the actual torque is determined by torque characteristic map 21 as shown in Figure 1 and the

5   plausibility check is performed on that basis.

The method is described in greater detail in Figure 4. Elements that were described in the earlier figures are designated with the same reference numbers. Besides rotational

10   speed 22, the actuation time for the main injection ti-Main, for the first pilot injection ti_Pilot1, and for the second post-injection ti_Post2, the corresponding actuation starts are also required.

15   Actuation start FB_Main for the main injection has reference number 3B. This variable is supplied to a first mass calculation unit 200 together with rotational speed N and the actuation time ti_Main of the main injection.

20   Actuation start FB_Pilot1 for the first pilot injection has reference number 7B. Actuation start FB_Pilot1, actuation time ti_Pilot1 of the first pilot injection and the engine speed are supplied to a second mass calculation unit 210.

25   Actuation start FB_Post2 of a second post-injection has reference number 2B and is supplied to a third mass calculation unit 220 together with actuation time ti_Post2 and a rotational speed N.

30   The first, second, and third mass calculation units store the fuel mass of the corresponding partial injections, depending on the rotational speed, actuation time and the associated actuation start. In a simple design, a three-dimensional characteristic map is provided for this purpose. Such a three-

35   dimensional characteristic map may be implemented for example via several two-dimensional characteristic maps or curves. In

one embodiment, it is further possible to provide that the
calculation be made via appropriate functions instead of a
characteristic map, based on the described input variables. In
this case, the characteristic map may be advantageously

5   approximated with an n^{th} degree polynomial.

The output signal from second mass calculation unit 210 is
supplied both to a first mass correction unit 215 and to a
node 217. Similarly, the output signal from the third mass

10   calculation unit is passed to a second mass correction unit
225 and a second node 227. The first and second mass
correction units, 215 and 225 respectively, each store a
correction factor which is used to correct the output variable
from the second mass calculation unit and the third mass

15   calculation unit respectively in such a way that the mass
signals incident at each of nodes 217, and 227 correspond to
the fuel mass that will deliver a contribution to the torque.
This is necessary because the fuel quantities during pilot
injection and post-injection have less effect than those of

20   the main injection. Consequently, larger fuel amounts must be
injected during the pre- and post-injections than during main
injection in order to achieve the same torque. This effect is
taken into account by mass correction units 215 and 225.

25   It is further possible to provide for the injection of
additional fuel for the exhaust aftertreatment system. This
fuel may be used to condition the exhaust aftertreatment
system, such as a particle filter, and/or an oxidation
catalytic converter. This fuel mass is calculated by exhaust

30   gas correction unit 235.

The individual output signals from first mass calculation unit
200, the node 217, node 227 and possibly exhaust gas
correction unit 225 are totaled in nodes 218, 228 and 238.

35   This means that there is a virtual fuel mass available at
output from node 238 that corresponds to the fuel mass which

should have been apportioned in the main injection to produce a given torque.

In node 248, the output signal from node 238 is combined with output signal TK from temperature correction unit 240. A signal from temperature sensor 242 is supplied to temperature correction unit 240. Other signals, such as rotational speed N, may be considered in addition to this signal. Based on the temperature, a factor is determined which takes into account the effect of the fuel temperature on the fuel mass.

As an alternative to the described method, the individual output signals from the mass calculation units may be corrected accordingly. It is possible to use multiple correction factors for the various partial injections.

The virtual fuel mass signal after temperature correction is then transmitted to torque characteristic map 21, as shown in Figure 1. This method presents an advantage since there are certain systems in which pressure buildup is not decoupled from fuel metering, and the injected fuel amount depends primarily on the injection actuation start angle. This dependency is not the case in common rail systems. In these systems, only the torque that is produced by a given quantity of fuel is dependent on the actuation start. In this case, the fuel mass depends on the actuation start to a much greater degree than in coupled systems.

In the method described in Figure 1, the fuel temperature is included in the calculation of the fuel mass, based on the volume. This is normally taken into account via the fuel density. In unit injector systems, or coupled systems, the fuel temperature has a much greater influence and as such is taken into account via a separate correction factor.

The particular advantage of this method is that the characteristic maps used are often also used to control the fuel injection.

~~Abstract~~   <u>Abstract of the Disclosure</u>

A method for monitoring an internal combustion engine is
described in which fuel is injected directly into at least one
5   combustion chamber in at least two partial injections via at
least one final controlling element, in which an actual torque
is determined at least on the basis of one fuel mass that is
to be injected and/or has been injected, such actual torque
being compared with a permitted torque of the internal
10   combustion engine and an error response being initiated if the
actual torque is in a predefined ratio to the permitted
torque. A corresponding application of the method for
monitoring an internal combustion engine as well as a
corresponding device are also described.
15

~~(Figure 1)~~

20

25

MARKED-UP VERSION OF
SUBSTITUTE SPECIFICATION